FIG. 1


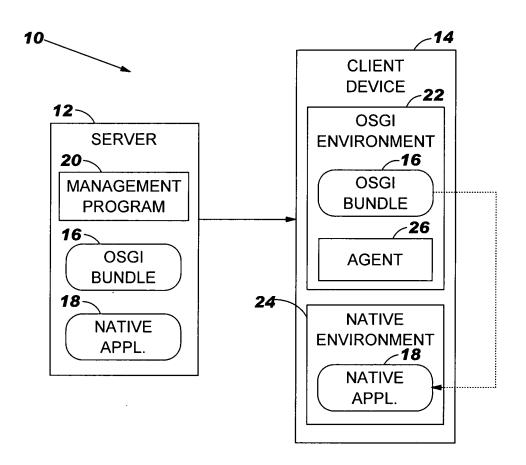


FIG. 2

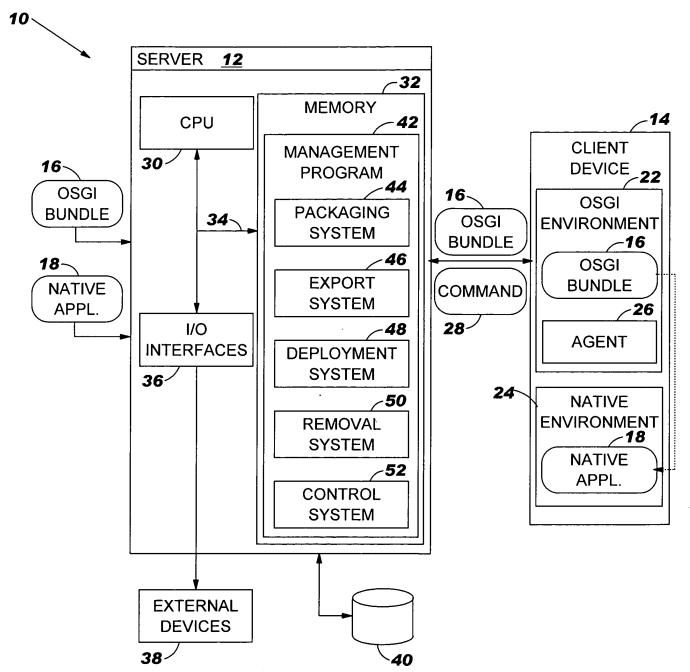

100

## FIG. 3

**S1** PACKAGE A NATIVE APPLICATION WITHIN AN OSGI BUNDLE TO CREATE A LINK BETWEEN THE OSGI BUNDLE AND THE NATIVE APPLICATION **S2** INSTALL THE OSGI BUNDLE WITHIN AN OSGI ENVIRONMENT OF A CLIENT DEVICE **S3** DEPLOY THE OSGI BUNDLE WITHIN A NATIVE ENVIRONMENT OF THE CLIENT DEVICE **S4** REMOVE THE NATIVE APPLICATION FROM WITHIN THE OSGI BUNDLE WHILE MAINTAINING THE LINK **S**5 CONTROL THE NATIVE APPLICATION WITHIN THE NATIVE ENVIRONMENT USING THE OSGI BUNDLE IN THE OSGI **ENVIRONMENT**